



POINT

Small figure, Great worth

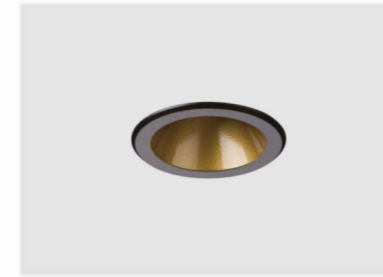

POINT	01.001C01000	
Power	3W	
Beam angle	16°/24°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	59lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	SMD	



white+silver



black



white+black



white



white+gold



black+gold




white+red



black+red

OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



01.001C01000

COLOUR | WH+SLV WH+BK WH+GD WH+RD BK WH BK+GD BK+RD MATERIAL | AL

POINT NEW


Tactful structure and reduced dimensions, latest technology applied in its small size, flexibly used in limited space.



POINT		01.001D01000
Power		2W
Beam angle		23°/30°/36°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		30lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD




POINT		01.001E01000
Power		3W
Beam angle		17°/20°/30°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		53lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

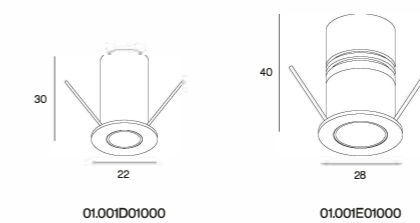

COLOUR | BK ■ WH □ WH+BK ■ WH+RD ■

MATERIAL | AL