



APOLLO PRO		01.209A02R00
Power		8W/10W/12W/15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35.000-50.000h LM80
LED chip		COB




APOLLO PRO		01.209B02R00
Power		8W/10W/12W/15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35.000-50.000h LM80
LED chip		COB

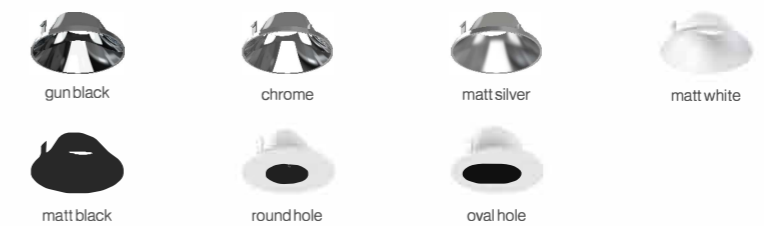


OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

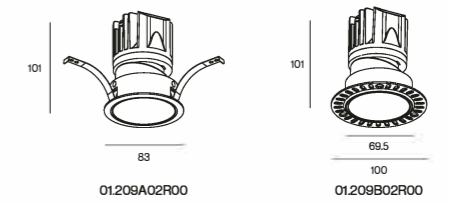

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |

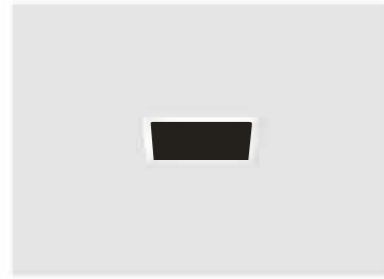

APOLLO PRO		01.209A02S10
Power		8W/10W/12W/15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB

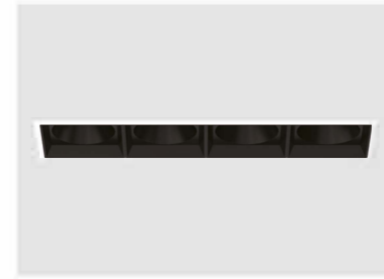


APOLLO PRO		01.209A02S40
Power		4*8W/4*10W/4*12W/4*15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB




APOLLO PRO		01.209A02S20
Power		2*8W/2*10W/2*12W/2*15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



APOLLO PRO		01.209A02S30
Power		3*8W/3*10W/3*12W/3*15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

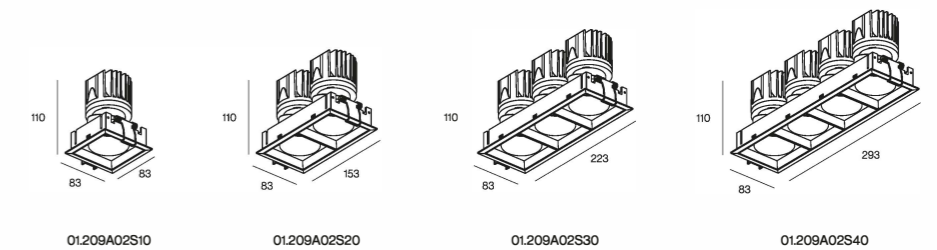

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |



APOLLO PRO		01.209B02S10
Power		8W/10W/12W/15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



APOLLO PRO		01.209B02S40
Power		4*8W/4*10W/4*12W/4*15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB




APOLLO PRO		01.209B02S20
Power		2*8W/2*10W/2*12W/2*15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



APOLLO PRO		01.209B02S30
Power		3*8W/3*10W/3*12W/3*15W
Beam angle		8°/18°/28°/38°/50°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		70lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

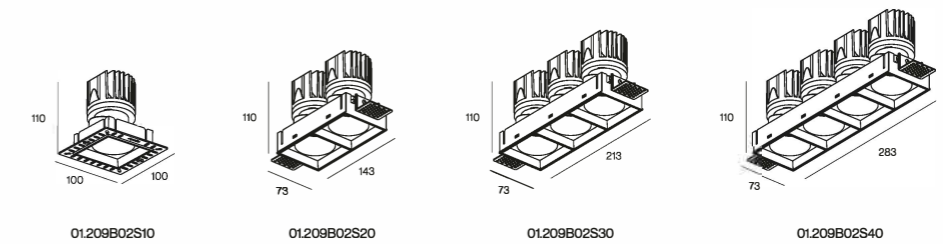

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |


COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |



APOLLO PRO

01.209A03R00


Power	20W/25W
Beam angle	21°/29°/40°/53°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	78lm/W
Color rendering index	>90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



APOLLO PRO


01.209B03R00

Power	20W/25W
Beam angle	21°/29°/40°/53°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	70lm/W
Color rendering index	>90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

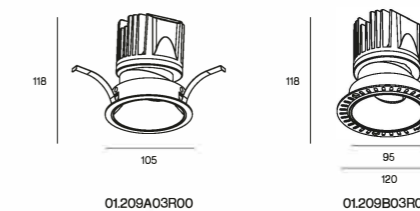

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |



APOLLO PRO


01209A04R00

Power	30W/35W
Beam angle	24°/31°/42°/54°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	88lm/W
Color rendering index	>90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



01209A04R00