



TO

Design, without limits

Now, the range of possibilities for creating smaller and more compact spotlights is much wider. And the freedom granted to our designers to create spectacular new models allows us to talk about the present and to foresee a future full of illusions.



TO	02:15A02000
Power	20W
Beam angle	15°/25°/36°/60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	110lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



TO	02:15B02000
Power	15W
Beam angle	wallwasher
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	73lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



TO	02:15C02000
Power	20W
Beam angle	15°/25°/36°/60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	110lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB




OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI

SUITABLE TRACK SYSTEM

1	3-CIRCUITS DALI
2	1-CIRCUIT DALI
3	3-CIRCUITS
4	1-CIRCUIT

ACCESSORIES

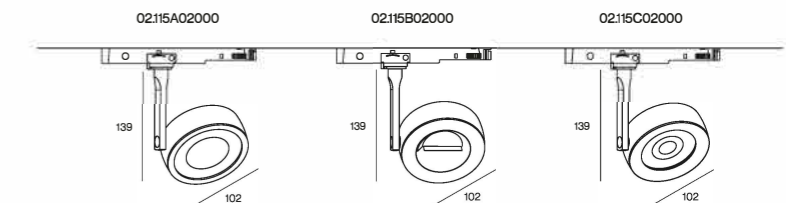

COLOUR | BK ■ WH □ | MATERIAL | AL