



HATCH


Small lamp body, multiple functions.
 Super long radiator with excellent heat dissipation effect.
 Minimal watts can be 6W.
 Trim and trimless version for your options.

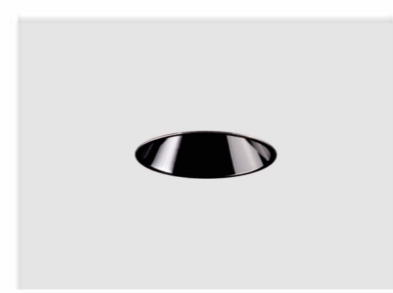

| HATCH | | 01228A01000 |
|-----------------------|--|-------------------------|
| Power | | 5W |
| Beam angle | | 18°/25°/32° |
| Color temperature | | 2700K/3000K/3500K/4000K |
| Light efficiency | | 42lm/W |
| Color rendering index | | ≥90 |
| Operating temperature | | -25°C - 50°C |
| Rated life hours | | 35,000-50,000h LM80 |
| LED chip | | COB |




| HATCH | | 01228B01000 |
|-----------------------|--|-------------------------|
| Power | | 5W |
| Beam angle | | 18°/25°/32° |
| Color temperature | | 2700K/3000K/3500K/4000K |
| Light efficiency | | 42lm/W |
| Color rendering index | | ≥90 |
| Operating temperature | | -25°C - 50°C |
| Rated life hours | | 35,000-50,000h LM80 |
| LED chip | | COB |




OPTIONS

| | |
|---|---------|
| 1 | Non-DIM |
| 2 | TRIAC |
| 3 | 0/1-10V |
| 4 | DALI |



01228A01000



01228B01000

COLOUR | BK ■ WH □

MATERIAL | AL

HATCH

Small lamp body,multiple functions.
 Super long radiator with excellent heat dissipation effect.
 Minimal watts can be 6W,Maximum watts can be 12W.
 Trim and trimless version for your options.



| HATCH | | 01.202A01000 |
|-----------------------|--|-------------------------------------|
| Power | | 10W/12W |
| Beam angle | | 13°/21°/27°/39°/50° |
| Color temperature | | 2700K/3000K/3500K/4000K/2700K-6000K |
| Light efficiency | | 58lm/W |
| Color rendering index | | ≥90 |
| Operating temperature | | -25°C - 50°C |
| Rated life hours | | 35,000-50,000h LM80 |
| LED chip | | COB |




| HATCH | | 01.202B01000 |
|-----------------------|--|-------------------------------------|
| Power | | 10W/12W |
| Beam angle | | 13°/21°/27°/39°/50° |
| Color temperature | | 2700K/3000K/3500K/4000K/2700K-6000K |
| Light efficiency | | 58lm/W |
| Color rendering index | | ≥90 |
| Operating temperature | | -25°C - 50°C |
| Rated life hours | | 35,000-50,000h LM80 |
| LED chip | | COB |




OPTIONS

| | |
|---|---------|
| 1 | Non-DIM |
| 2 | TRIAC |
| 3 | 0/1-10V |
| 4 | DALI |
| 5 | BLE |
| 6 | ZIGBEE |



01.202A01000



01.202B01000

COLOUR | BK ■ WH □

MATERIAL | AL