



shiny silver



rose gold



gold



bright black




matt black




matt white


# LATTICE CEILING

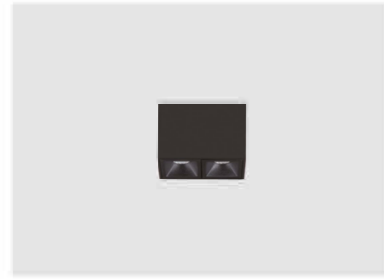

LATTICE CEILING		03:180D02000
Power		4W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		62lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD



LATTICE CEILING		03:180D15000
Power		30W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		78lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD

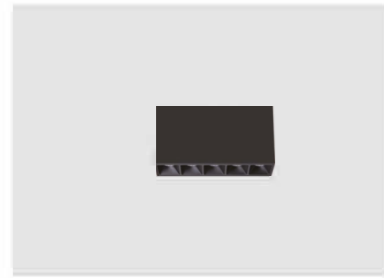

LATTICE CEILING		03:180D05000
Power		10W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		73lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD



LATTICE CEILING		03:180D10000
Power		20W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		79lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		SMD




#### OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V

#### ACCESSORIES

- FROSTED LENS
- SQUARE SPREAD LENS
- RECTANGLE SPREAD LENS

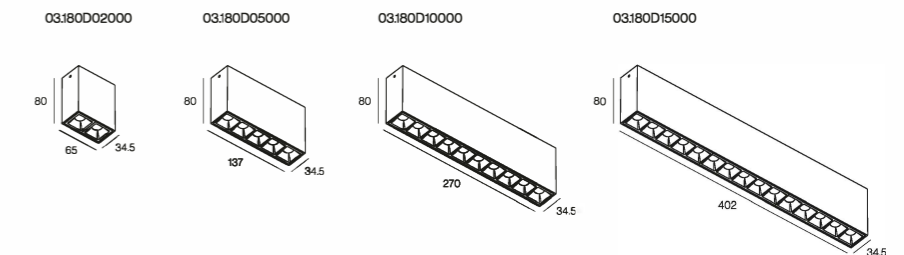

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |