







PABLO		02.096A01000
Power	10W/12W/15W	
Beam angle	15°/25°/38°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	83lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	




PABLO		02.096A02000
Power	10W/12W/15W	
Beam angle	15°/25°/38°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	83lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



PABLO		02.096B01000
Power	20W/25W	
Beam angle	17°/23°/40°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	93lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



PABLO		02.096B02000
Power	20W/25W	
Beam angle	17°/23°/40°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	93lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



COLOUR | BK ■ WH □ | MATERIAL | AL



PABLO		02.096C01000
Power	30W	
Beam angle	17°/23°/40°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	90lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



PABLO		02.096C02000
Power	30W	
Beam angle	17°/23°/40°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	90lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	




OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI

SUITABLE TRACK SYSTEM

1	3-CIRCUITS DALI
2	1-CIRCUIT DALI
3	3-CIRCUITS
4	1-CIRCUIT


ACCESSORIES

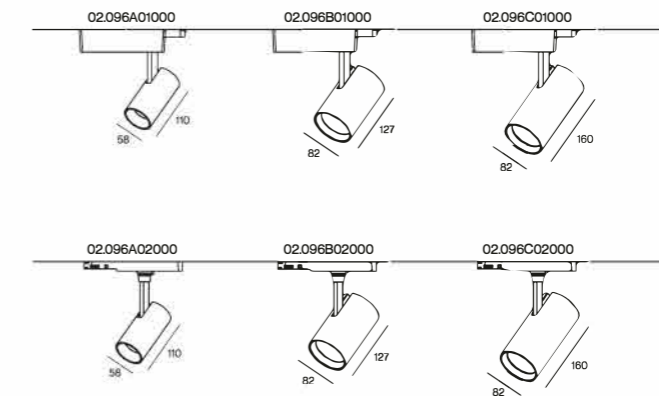


COLOUR | BK ■ WH □ | MATERIAL | AL



PABLO		02.096D01000
Power	38W	
Beam angle	17°/23°/40°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	84lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



PABLO		02.096D02000
Power	38W	
Beam angle	17°/23°/40°/50°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	84lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



PABLO		02.096E01000
Power	45W	
Beam angle	12°/21°/35°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	84lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



COLOUR | BK ■ WH □ | MATERIAL | AL



PABLO		02.096E02000
Power	45W	
Beam angle	12°/21°/35°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	84lm/W	
Color rendering index	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



COLOUR | BK ■ WH □ | MATERIAL | AL

OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI

SUITABLE TRACK SYSTEM

1	3-CIRCUITS DALI
2	1-CIRCUIT DALI
3	3-CIRCUITS
4	1-CIRCUIT

ACCESSORIES

