



SMART


SMART	01:172A01000
Power	10W/12W
Beam angle	15°/26°/38°/50°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	83lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35.000-50,000h LM80
LED chip	COB



SMART	01:172A02000
Power	25W/30W
Beam angle	16°/21°/33°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	95lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35.000-50,000h LM80
LED chip	COB




OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

ACCESSORIES	
	HONEYCOMB LOUVER



01:172A01000




01:172A02000


COLOUR | BK ■ WH □ | MATERIAL | AL




SMART
Turn as you wish

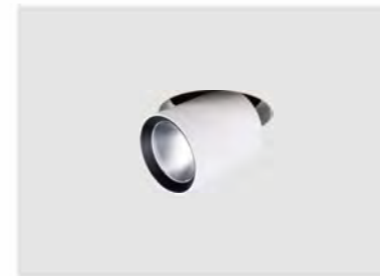


SMART	01:172B01000
Power	10W/12W
Beam angle	15°/26°/38°/50°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	83lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35.000-50,000h LM80
LED chip	COB




SMART	01:172B02000
Power	25W/30W
Beam angle	16°/21°/33°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	95lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35.000-50,000h LM80
LED chip	COB




OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

ACCESSORIES	
	HONEYCOMB LOUVER

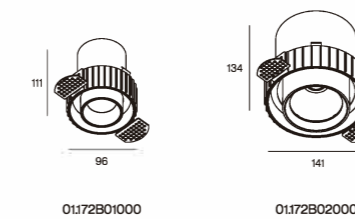

COLOUR | BK ■ WH □ | MATERIAL | AL

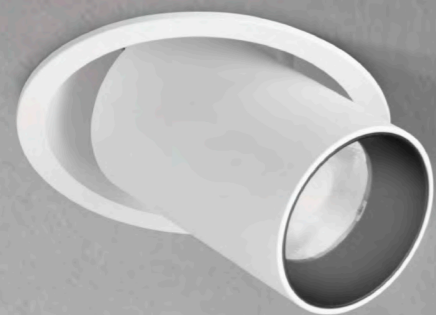

SMART



SMART

01172D01000


Power	10W/12W
Beam angle	15°/26°/38°/50°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	83lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

ACCESSORIES



112

112

01172D01000

COLOUR | BK ■ WH □

MATERIAL | AL