



CONCH



CONCH	01:91A01000
Power	3W
Beam angle	17°/26°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	SMD

CE CB TÜV CCC △ IP20 220-240V Class II Ø35mm UGR<19 Fixed
Ingress Protection Voltage



CONCH	01:91A02000
Power	6W/8W
Beam angle	19°/26°/37°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	84lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB

CE CB TÜV CCC △ IP20 220-240V Class II Ø50mm UGR<19 Fixed
Ingress Protection Voltage




CONCH	01:91A03000
Power	10W/12W
Beam angle	18°/22°/32°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	78lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB

CE CB TÜV CCC △ IP20 220-240V Class II Ø65mm UGR<19 Fixed
Ingress Protection Voltage



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

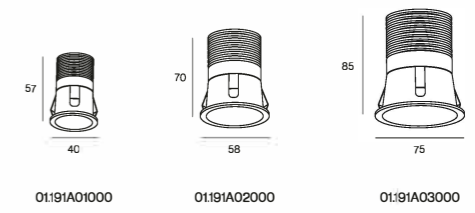

COLOUR | WH+BK WH WH+GD WH+RD WH+SLV | MATERIAL | AL |