



BOOST

01.210A02R00

Power	6W/8W/10W
Beam angle	20°/26°/31°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	74lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



BOOST

01.210B02R00

Power	6W/8W/10W
Beam angle	20°/26°/31°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	74lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



gun black



chrome



matt silver



matt white



matt black




round hole




oval hole

OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



01.210A02R00



01.210B02R00



BOOST

Low lamp body, height only 65mm, it's available for low ceiling, ordinary 75mm cut-size, 0-20° adjustable.


COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |




BOOST		01.210A02S10
Power		6W/8W/10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB

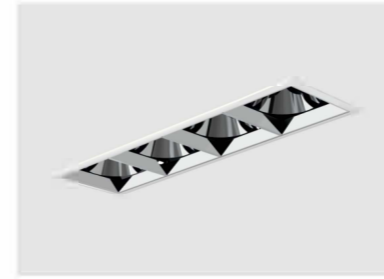

BOOST		01.210A02S40
Power		4*6W/4*8W/4*10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB





BOOST		01.210A02S20
Power		2*6W/2*8W/2*10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



BOOST		01.210A02S30
Power		3*6W/3*8W/3*10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB

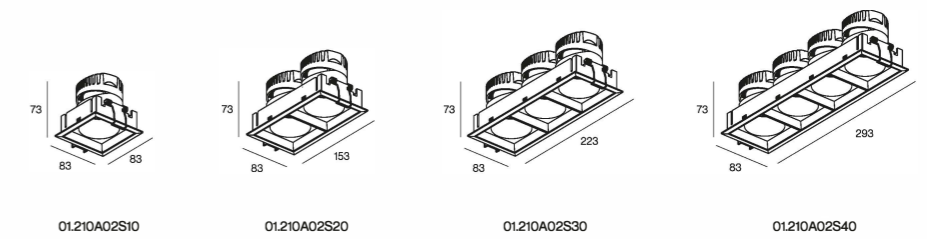



COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |



COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |




BOOST		01.210B02S10
Power		6W/8W/10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB

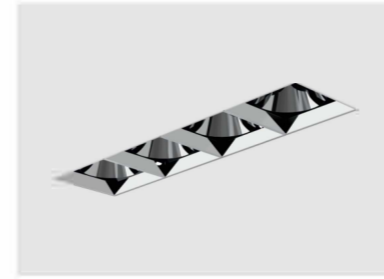


BOOST		01.210B02S40
Power		4*6W/4*8W/4*10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB

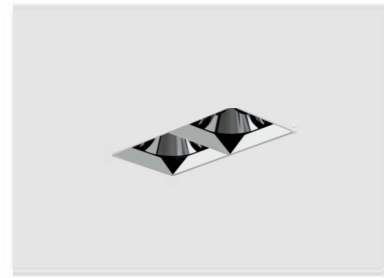


BOOST		01.210B02S20
Power		2*6W/2*8W/2*10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



BOOST		01.210B02S30
Power		3*6W/3*8W/3*10W
Beam angle		20°/26°/31°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		74lm/W
Color rendering index		>90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

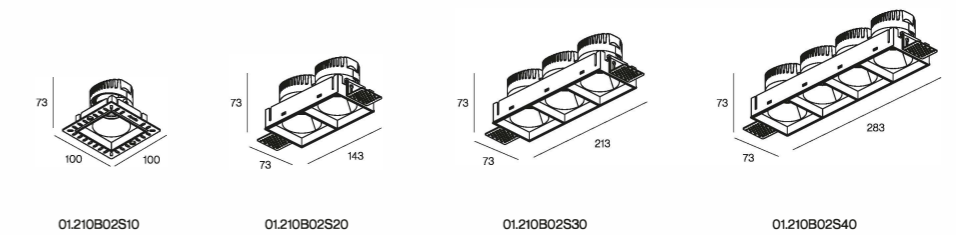

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |

COLOUR | GBK ■ CR ■ MSLV □ MWH □ MBK ■ | MATERIAL | AL |