




TRUNK







TRUNK		01.200A01000
Power		8W/10W
Beam angle		27°/35°/43°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		78lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB




TRUNK		01.200A04000
Power		25W/30W
Beam angle		17°/25°/35°/50°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		103lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



TRUNK		01.200A02000
Power		12W/15W
Beam angle		17°/23°/35°/43°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		68lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB




TRUNK		01.200A03000
Power		20W/25W
Beam angle		17°/20°/31°/43°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		69lm/W
Color rendering index		≥90
Operating temperature		-25°C - 50°C
Rated life hours		35,000-50,000h LM80
LED chip		COB



#### OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

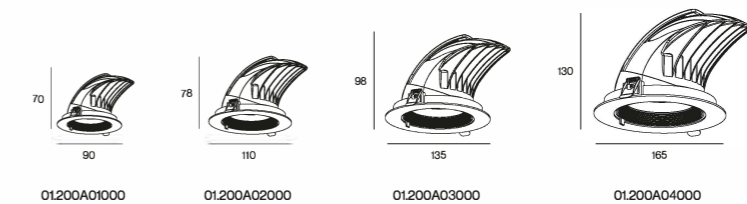

COLOUR | BK ■ WH □ | MATERIAL | AL

COLOUR | BK ■ WH □ | MATERIAL | AL