


ROUL



| | |
|-----------------------|-------------------------|
| ROUL | 03183A01000 |
| Power | 10W |
| Beam angle | 18°/20°/30° |
| Color temperature | 2700K/3000K/3500K/4000K |
| Light efficiency | 79lm/W |
| Color rendering index | ≥90 |
| Operating temperature | -25°C - 50°C |
| Rated life hours | 35,000-50,000h LM80 |
| LED chip | COB |

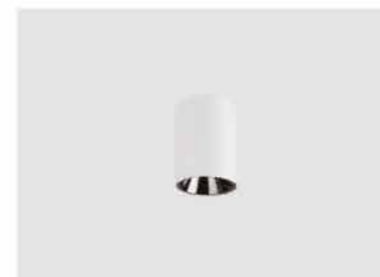

| | |
|-----------------------|-------------------------|
| ROUL | 03183A02000 |
| Power | 15W |
| Beam angle | 18°/20°/30° |
| Color temperature | 2700K/3000K/3500K/4000K |
| Light efficiency | 66lm/W |
| Color rendering index | ≥90 |
| Operating temperature | -25°C - 50°C |
| Rated life hours | 35,000-50,000h LM80 |
| LED chip | COB |




| | |
|-----------------------|-------------------------|
| ROUL | 03183A03000 |
| Power | 25W/30W |
| Beam angle | 18°/22°/34° |
| Color temperature | 2700K/3000K/3500K/4000K |
| Light efficiency | 73lm/W |
| Color rendering index | ≥90 |
| Operating temperature | -25°C - 50°C |
| Rated life hours | 35,000-50,000h LM80 |
| LED chip | COB |



OPTIONS

| | |
|---|---------|
| 1 | Non-DIM |
| 2 | TRIAC |

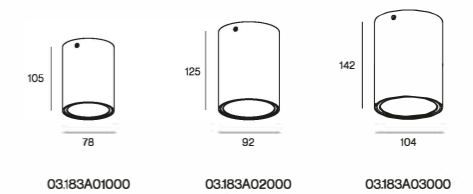

COLOUR | WH BK | MATERIAL | AL