

GOLDFISH

The unique narrow side face ring design breaks through the traditional way of expression.
Rich color matching, to meet the various theme space applications.
30° shading Angle design, UGR<6, to provide you with more comfortable lighting space.
Various dimming control schemes are available with dimming accuracy up to 0.1%.






GOLDFISH


01:176B01000

Power	8W/10W
Beam angle	19°/26°/37°/55°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	80lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB





OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



01:176B01000

COLOUR | BK ■ WH □ WH+BK ▣ WH+GD ▤ WH+RG ▥ WH+SLV □ WH+RD ▧ | MATERIAL | AL

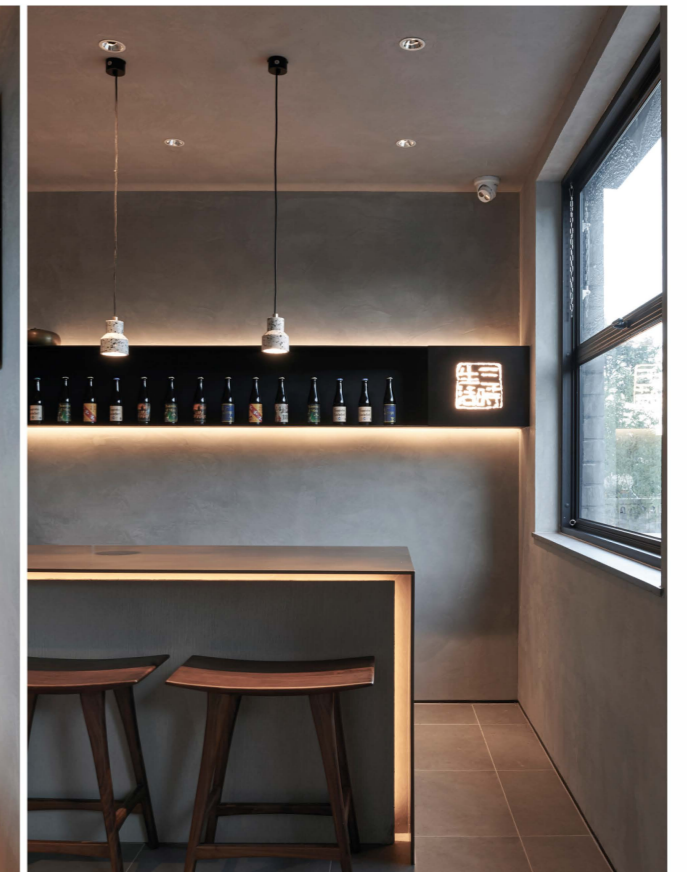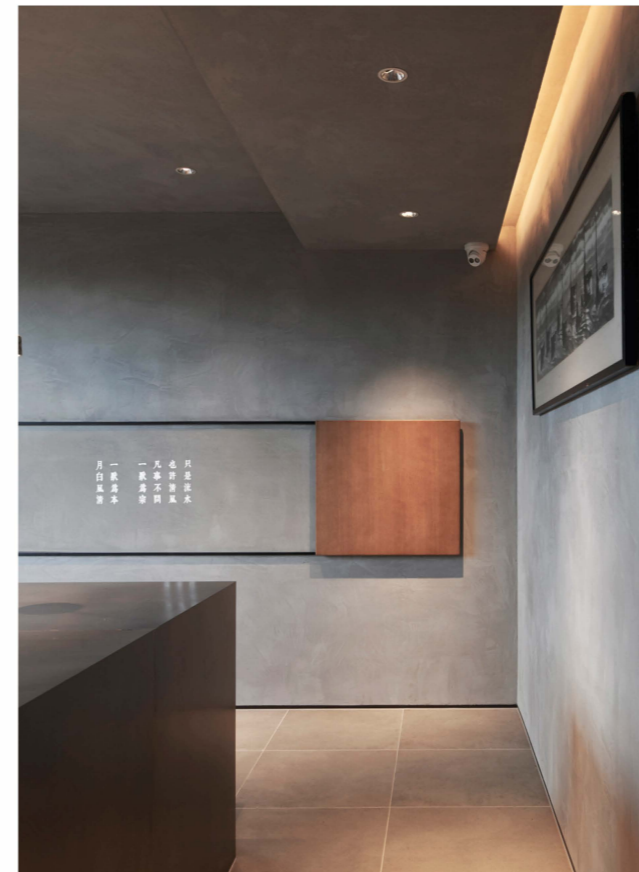

GOLDFISH

The unique narrow side face ring design breaks through the traditional way of expression.
 Rich color matching, to meet the various theme space applications.
 30° shading Angle design, UGR<6, to provide you with more comfortable lighting space.
 Various dimming controlschemes are available with dimming accuracy up to 0.1%.




GOLDFISH		01176C01000
Power	8W/10W	
Beam angle	19°/26°/37°/55°	
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K	
Light efficiency	84lm/W	
Color renderingindex	≥90	
Operating temperature	-25°C - 50°C	
Rated life hours	35,000-50,000h LM80	
LED chip	COB	



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



112.5

01176C01000

COLOUR | GD ■ BK ■ WH □ | MATERIAL | AL |